

SS16P

SOLAR LED PARKING LIGHT

DESIGNED FOR MAINTENANCE FREE LIGHTING DIFFERENT PUBLIC AND PRIVATE SITES, PARKINGS, PARKS, GARDENS, ALLEYS, OPEN AREAS, QUAYS AND OTHER AREAS.

INNOVATIVE, HIGH-TECH PRODUCT WITH A MODERN DESIGN, PROVIDING EXTREMELY EVEN LIGHTING OF THE ROAD LANE FROM A LOW HEIGHT AND LARGE DISTANCE BETWEEN THE POLES.


EXTREMELY LONG LIFESPAN, MAINTENANCE FREE, NO NEED OF BATTERY REPLACEMENT.

INSTALLATION FRIENDLY (UPON UNPACKING YOU NEED TO FIX THE EQUIPMENT TO THE POLE ONLY).

FACILITY FOR INTELLIGENT (MIXED) POWER SUPPLY SOLAR PLUS CONVENTIONAL – OPTIONAL).

False Colours
 illuminances

<input type="text" value="10.00"/>	10.00 lx
<input type="text" value="8.75"/>	8.75 lx
<input type="text" value="7.50"/>	7.50 lx
<input type="text" value="2.25"/>	2.25 lx
<input type="text" value="5.00"/>	5.00 lx
<input type="text" value="3.75"/>	3.75 lx
<input type="text" value="2.50"/>	2.50 lx
<input type="text" value="1.25"/>	1.25 lx
<input type="text" value="0.00"/>	0.00 lx

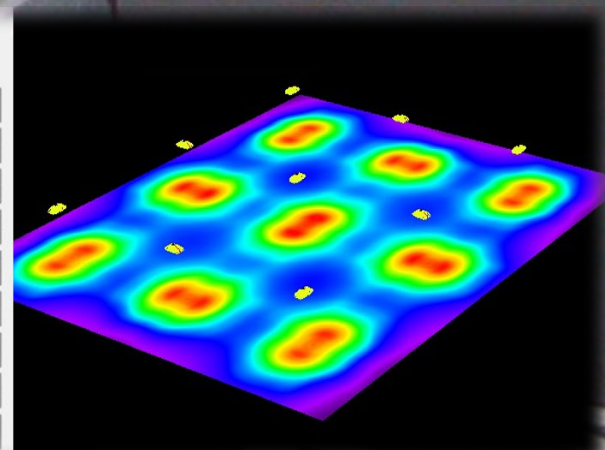

SS16P

CHARACTERISTICS

- Automatic night/day on/off & economy late night dimming
- Authonomy in nominal mode 34 hours (2.8 nights)
- Authonomy in Late night dimming mode 50 hours (4.2 nights):
 - Factory preset 50 % illuminance decreasing after 4 hours till 1 h before dawn
 - User specified illuminance decreasing 20 ÷ 90 %;
 - dimming start 2 ÷ 8 hours
 - dimming stop 0.5 ÷ 3 h before dawn.
- Remote control available
- Operating temperature from -35° up to +65°C
- Maximum air humidity 95 %

LIGHT SOURCE

LED Power	30 W
Led driver Power Efficiency	97 %
Total Power	31 W
LED Light Output	160 lm/W
Current Efficiency	78 %
LED Luminous Flux	3 770 lm
Junction Temperature at Ta = 25°C	55°C
Thermal Efficiency	94 %
Lens Efficiency	92 %
Real Luminaire Efficacy (LER)	108 lm/W
Color Rendering Index (CRI)	65÷80
Real Lamp Luminous Flux for:	
Cool White (4000 ÷ 6200 K)	3 262 lm
Neutral White (3700 ÷ 5000 K)	3 027 lm
Warm White (2600 ÷ 4300 K)	2 560 lm
Zero Light Pollution	0 cd at 90°
Lifespan L70	160 000 h (36 years)

BATTERY

Type	Sealed maintenance free, Flame retardant, Lithium technology
Capacity	100 Ah
Nominal voltage	13 V
Charging	built in intelligent charge controller (BMS & MPPT)
Lifespan	22 years (8 000 charging cycles)

SOLAR MODUL


Type	Monocrystalline
Peak power	300 Wp
Lifespan	25 years

PARAMETERS OF THE MECHANICAL CONSTRUCTION

Realization	Aluminum cast alloy + Polycarbonate UV stabilized
Height	3050 mm
Tube diameter	ø 284 mm
Diameter	ø 380 mm
Diameter of the pole at the place of fixing	from ø 108 up to ø 133 mm
Weight	67 kg


Additional deliveries

- Zink plated metal poles
- Means of fixing the pole underground / fundament

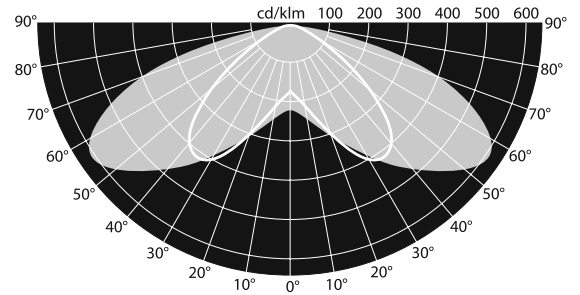

L = 24 m, H = 7.5 m

L – Distance between the light sources (poles)
H – Height of the light source above the ground

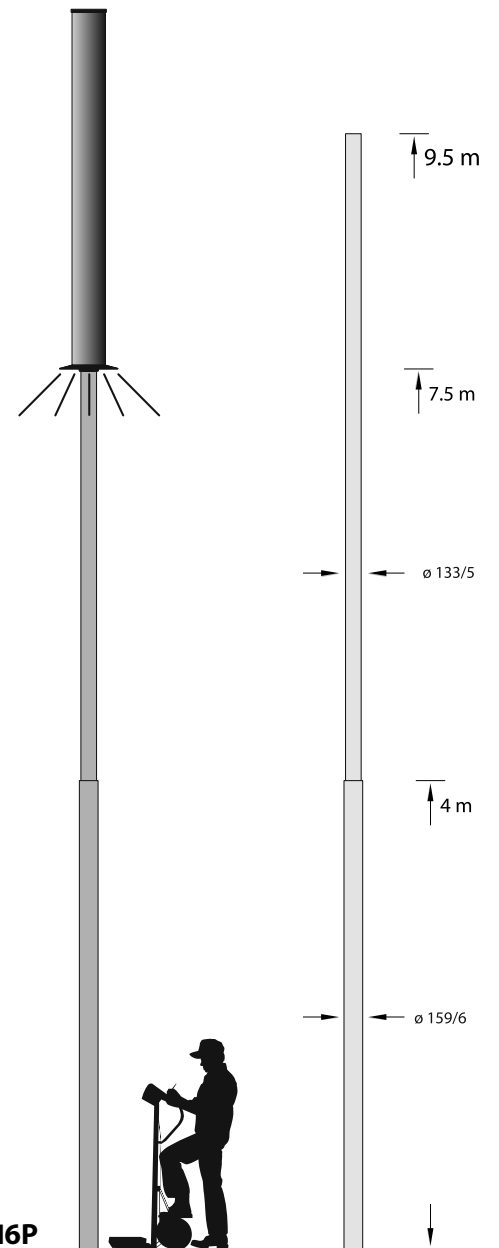

CE
Quality Assurance

EN61000-6-3:1997, EN61000-6-1:1997
ISO 9001:2008; AQAP 2110