

CA3

LOW INTENSITY AVIATION OBSTACLE LIGHTS type A end type B DC or AC power supply with or without built in controller

THE EQUIPMENT IS DESIGNED FOR INSTALLATION ON HIGH BUILDINGS, TOWERS, PILLARS, CHIMNEYS ETC., WHICH SHOULD BE MARKED AS OBSTACLES FOR AVIATION, ACCORDING TO THE ICAO REQUIREMENTS.





CA3

TECHNICAL CHARACTERISTICS

Luminous intensity:	>10 cd / >32 cd
Power consumption:	3 W / 8 W
Light source:	LED
Emitted light colour:	red
Approx life time:	100 000 hours
Power supply:	12, 24 or 48 Vdc 85 ÷ 265 Vac; 50/60 Hz
Operating temperature:	-50° C to 55° C
Overall dimensions:	300 x 305 x 73 mm
Weight:	1.450 kg
IP degree:	IP66

Mechanical construction

Type of material:	Stainless steel and Aluminium alloy
Installation Mode:	horizontal, vertical, on pillar from ø20 mm up to ø40 mm

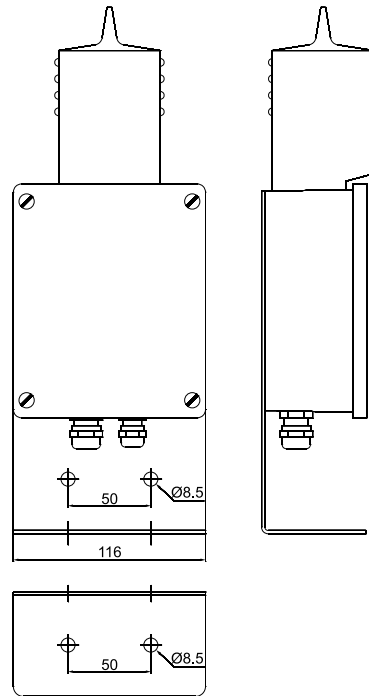

Installation bracket EL8.667.018
for fixing the equipment to vertical
or horizontal tube

ORDERING CA3

